


Dexxo Pro 800/1000 io

GARAGE DOORS MOTORIZATION

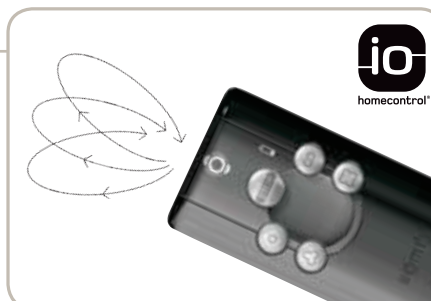

Radio twin-directional transmissions

A reliable solution, compatible with any type of door.

■ Reliability tested.



■ Up and running in 90 seconds.

■ Fully customizable installation
> 15 Programmable parameters.

■ An extended range of accessories to be connected for greater comfort and safety.

■ An advanced LCD interface.

■ io-homecontrol® radio bi-directional transmission compatible with all products of the YeSseo range

TECHNICAL CHARACTERISTICS

Mains power supply	230 V - 50 Hz
Motor power supply	24 Vdc
Max. power consumption in operation	600 W (offset lighting 500 W included)
Max. power consumption on standby	7 W
Traction force - peak force	1,000 N
Max. no. of operations/day	20 (standard rail) 50 (high-performance rail)
Max. speed	18 cm/s
Operating temperature	-20° C / +60° C
Somfy radio frequency	twin-directional io-homecontrol® 868 - 870 MHz
Number of channels that can be memorised	unlimited
Weight per pack	6.8 kg
Pack dimensions	L 470, H 230, I 210
Tested for	90,000 cycles (standard rail)

PACK

COMFORT AND SAFETY ACCESSORIES



	Dexxo Pro 1000 io motor	Keytis 4 io ref. 1841053	Keytis 4 Home io ref. 1841054	Photoelectric cells ref. 9014994	24 V amber light ref. 9015171	Backup battery ref. 9001001	Radio Safety Kit for side door ref. 1822285	Mechanical Lock ref. 9015607	Packs per pallet
Dexxo Pro 800 io ref. 1216265	●	● (1x)	-	-	-	-	-	-	30
Dexxo Pro 1000 io ref. 1216170	●	● (1x)	-	-	-	-	-	-	30

*Mounting set including: 1 arm for connection to door, 1 door block, 1 hinged lintel block, 4 ceiling brackets, screws and fittings.